

# A Comparative Study of the CNN Model for AD Diagnosis

Vyshnavi Ramineni, Goo-Rak Kwon

## Abstract

Alzheimer's disease is one type of dementia, the symptoms can be treated by detecting the disease at its early stages. Recently, many computer-aided diagnosis using magnetic resonance image(MRI) have shown a good results in the classification of AD. Taken these MRI images and feed to Free surfer software to extra the features. In consideration, using T1-weighted images and classifying using the convolution neural network (CNN) model are proposed. In this paper, taking the subjects from ADNI of subcortical and cortical features of 190 subjects. Consider the study to reduce the complexity of the model by using the single layer in the Res-Net, VGG, and Alex Net. Multi-class classification is used to classify four different stages, CN, EMCI, LMCI, AD. The following experiment shows for respective classification Res-Net, VGG, and Alex Net with the best accuracy with VGG at 96%, Res-Net, GoogLeNet and Alex Net at 91%, 93% and 89% respectively.

Keywords : Alzheimer's disease | Free surfer | Convolution Neural Network | MRI

## II. INTRODUCTION

Over 10 million people are expected to be affected by 2050 as per World Alzheimer's report[1]. Alzheimer's Disease is one type of dementia which mainly seen in elderly people. Death is inevitable in AD, and its been sixth disease which causes most people deaths around the world [2,3]. Destruction of neurons causes the change in the brain with few years of symptoms leads to AD. Dementia is not a single illness but damage to the brain shrinking, and additional areas and lobes will be affected. Symptoms are memory loss, gradual loss of speech, impulsive behavior, abnormalities in mood and sleep[4]. AD patient's diagnosis

includes a collection of neurological, laboratory and neuroimaging examination. Recently by using the speech/voice of the patients along with laboratory results [5-7]AD is identified.[voice/speech paper]. Much research is going on but there is no cure, yet the only way is slow the processes of aging of the disease. Therefore it's necessary to detect Alzheimer's at the early stage. They are 4 stages in the process of the disease healthy brain CN, EMCI, LMCI, and AD[8,9]. The uncurable stage/severe conditions of the disease is considered as Alzheimer's disease(AD). Mild Cognitive Impairment (MCI) is the stage where the symptoms can be observed. Symptoms shown during this stage are a decrease in the ability to learn, inability to daily

\* This study was supported by research funds from Chosun University, 2023.

This paper has been supported by ...

Manuscript : 2023.07.03  
Revised : 2023.08.16

Confirmation of Publication:2023.08.28  
Corresponding Author : Goo-Rak kwon email:  
grkwon@chosun.ac.kr

tasks/slow down[10]. Mild cognitive impairment has started showing in different ranges known as early MCI and late MCI. In the present years, machine learning has improved in the field of health/medicinal. Health care has large-scale data to be processed, by using ML algorithms[11,12] its shows success in the detection and prediction of different diseases including Alzheimer's disease. In recent years, convolutional neural networks have given better results in the medical field.

In the present paper, sMRI is intended to perform AD classification, the MRI influence the cumulative loss and results in the compression of the neuropil showing the volume of the cortical and sub-cortical thickness of the brain image [13–15].

We have studied the CNN model for the classification of Alzheimer's disease. Normalization is performed of the feature to improve the performance and stability in the training of the model. Normalization helps the model dataset to have a common scale without the different range of values. Three different network models are used for diagnosis Res-Net, VGG, GoogLeNet, and Alex Net with one convolutional layer. All these are selected to achieve better accuracy with simple algorithm structure in medical images.

### III. METHODOLOGY

#### 2.1 sMRI Dataset

For diagnosis, the Alzheimer's disease, Alzheimer's disease neuroimaging initiative database (<http://adni.loni.usc.edu/>) has been taken. ADNI project created in 2003, made a public-private partnership

to examine AD at the early stage. ADNI Consist of a different combination of data like MRI, PET, and other biomarker images with neuro-physical assessment. ADNI data used in this performing this paper is found in ADNI serve data.

#### 2.2 Subjects

In our study, we have accessed the data from ADNI. The dataset consists of 4 groups: AD, EMCI, LMCI, and CN. A total of 190 subjects: 46 AD subjects, 54 EMCI subjects, 51 LMCI subjects, and 49 CN subjects have been taken from the ADNI website as shown in Table 1.

Table 1. Subject Report

Group	No. of Subjects	Age Range
AD	46	75.65 ± 7.9
EMCI	54	72.80±6
LMCI	51	74.5 ± 3.6
CN	49	78.34 ± 8.6

The dataset has four different categories:

- (1) AD with 46 subjects: Age ranging from  $75.65 \pm 7.9$ .
- (2) EMCI with 54 subjects: Age ranging from  $72.80 \pm 6$ .
- (3) LMCI with 51 subjects: Age ranging from  $74.5 \pm 3.6$ .
- (4) CN with 49 subjects: Age ranging from  $78.34 \pm 8.6$ .

We have almost equal number of subjects in all the groups to make the model more unbiased. The data set has been split into 70% training and 30% testing for evaluation.

#### 2.3 Feature Extraction:

After the data is collected, we extract

the features from those T1-weighted images in the next step. For the current study, we have used Free Surfer using the full pipeline to compute comprise 31 regions from each hemisphere. In the study we have used from both hemispheres, 62 features of each subject. These 31 regions are shown in Table 2.

Table 2. Regions extracted from each hemisphere using free surfer software

Regions
1. caudal anterior cingulate cortex
2. caudal middle frontal gyrus
3. cuneus cortex
4. entorhinal cortex
5. fusiform gyrus
6. inferior parietal cortex
7. inferior temporal gyrus
8. isthmus cingulate cortex
9. lateral occipital cortex
10. lateral orbital frontal cortex
11. lingual gyrus
12. medial orbital frontal cortex
13. middle temporal gyrus
14. Para hippocampal gyrus
15. paracentral lobule
16. pars opercularis
17. pars orbitalis
18. pars triangularis
19. pericalcarine cortex
20. postcentral gyrus
21. posterior cingulate cortex
22. precentral gyrus
23. precuneus cortex
24. rostral anterior cingulate cortex
25. rostral middle frontal gyrus
26. superior frontal gyrus
27. superior parietal cortex
28. superior temporal gyrus
29. supramarginal gyrus
30. transverse temporal cortex
31. temporal pole

And [4], [16], [17] each of the anatomical fields is calculated for each region included (vertices, surface area, gray matter, average thickness, thickness standard,

integrated rectified mean curvature, integrated rectified Gaussian curvature, folding index, intrinsic curvature index). A total of 558 features have been used during this study taken for each subject/patient.

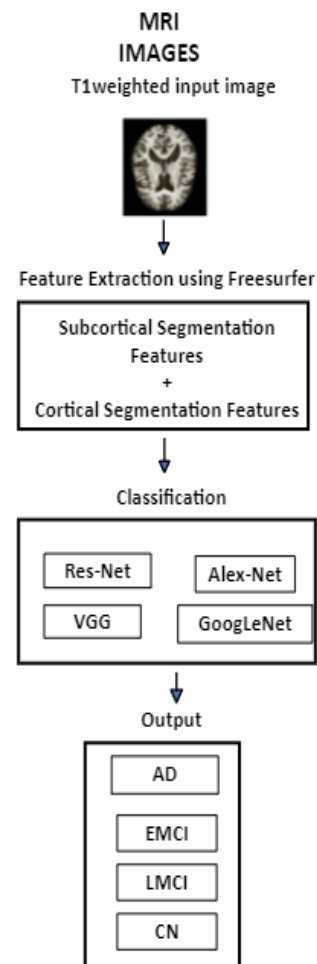


Fig 1. Block diagram of the diagnosis process.

## 2.4 Proposed Model

In the proposed work, we have evaluated and compared four different models, Res-Net, VGG, GoogLeNet, and Alex Net for the classification of Alzheimer's disease. For identifying the disease, accurate models are desired appropriate measures should be applied for an earlier stage.

The flow followed is shown in Figure 1. Magnetic resonance imaging (MRI) are having both subcortical segmented

features and cortical segmentation features that have been used in the proposed model. The data taken from ADNI are preprocessed images by ADNI-approved protocol.

The obtained features are used for classification. Before sending these extracted features, the normalization step is done which make the model have better accuracy. The normalization step helped to overcome the problem the clear out the abnormality of the data. The classification is done by four methods: Residual network, Visual geometry group, Going deeper with convolution, and Alex Net with a single convolutional layer.

This is made to reduce the computation time and reduce the complexity of the model. Alex-net is used because of reduce overlapping and reduction of error. It contains convolution, max-pooling, and fully connected layers. As we study in the revisors study VGG outperforms the task outside the images and is built as deep CNN and used for prediction of images with a large scale of data. The Res-Net is used to support hundreds and thousands of convolutional layers and has significantly enhanced the performance of neural networks. It helps to maintain a low error rate with much deeper in the network. It will help to solve the vanishing gradient problem effectively during the backpropagation. It learns residual functions from its inputs. Skip connections map identities in Residual Networks, and layers add their outputs. GoogLeNet is used for its advantage of loss combination of the intermediate and final loss and reduction of the computation. This google net is based on inception and

used multiple filter sizes.

## IV. EXPERIMENT RESULT & DISCUSSION

### 3.1 Performance and Evaluation Parameters

In the present study we have used the multi-class classification to evaluate the model performance by using the Res Net, VGG, GoogLeNet, and Alex Net classifiers.

Table 3. Multiclass confusion matrix

Prediction classification				
classes	AD	LMCI	EMCI	HC
AD	TP	$F_{AL}$	$F_{AE}$	$F_{AH}$
LMCI	$F_{LA}$	TP	$F_{LE}$	$F_{LH}$
EMCI	$F_{EA}$	$F_{EL}$	TP	$F_{EH}$
CN	$F_{HA}$	$F_{HL}$	$F_{HE}$	TP

Each of these classifiers is responsible for the prediction of the result class accurately. To determine we have used the parameters for the number of correct output form n the matrix by true positive (TP), true negative (TN), false positive (FP), and false negative (FN). To understand this by using the Table 3. Other parameters which are used to predict are accuracy, precision, and recall from the equation (1), (2), and (3).

$$\text{Accuracy} = \frac{TP+TN}{TP+TN+FP+FN} \quad (1)$$

$$\text{precision} = \frac{TP}{TP+FP} \quad (2)$$

$$\text{Recall} = \frac{TP}{TP+FN} \quad (3)$$

Evaluation and accuracy are the parameters of the multi-class classifier with the help of a confusion matrix.

Accuracy can vary depending on the dataset so by adding on precision and recall can be predicted accurately.

### 3.2 Experiment Result

Table 4. Results of classification

Classification	Acc%	Rec%	Pre%
<b>CNN-VGG</b>	96%	98%	89%
<b>CNN-Alex Net</b>	89%	86%	92%
<b>CNN-GoogLeNet</b>	93%	99%	87%
<b>CNN-ResNet</b>	91%	95%	86%

Acc% = Accuracy percentage, Rec% = Recall percentage, and Pre% = precision percentage.

The experiment used the Python environment. All the techniques have performed well with 96%, 89%, 93% and 91% accuracy for VGG, Alex net, GoogLeNet, and Res net respectively. Though the accuracy may not be accurate because of the unstable distribution of class. In addition, precision and recall are also calculated as shown in Table 4.

### 3.3 Discussion

Many research approaches have been used by researchers for the classification of AD by using deep learning methods. Jing Sun et al.[18] have proposed the Alex-net model for the classification of scene images. The convolutional neural network model is used to classify the images of the different room structures via Alex Net. Taranjit Kaur et al.[19]

Classification based on VGG for the brain images. Has been used the pre-trained model of VGG and obtained the labels. This model used the T2 weighted images of the brain MRI. Sachin kumar et al.[20] have

studied residual networks with a different number of layers for the classification of tomato disease. Shruti Pallawi et al.[21] have proposed the evolution and comparison of different networks having used the deep layers and overcoming the problem of overfitting the data To solve this, multiple filters at the sample level of different sizes made the model. wider instead of deeper. The method for preprocessing the sMRI data[22,23]. Various splitting methods are taken for the classification and obtained the significant effect of AD.

## V. CONCLUSION

We presented the comparison of the different models of CNN with a single convolutional layer to classify Alzheimer' s disease. Subjects are taken from the ADNI website and taken the T1-weighted images which later used sMRI are sent to pre-processed stage using free surfer software to extract the features and used obtained features for classification. In the current study classification is done by using four different classifiers VGG, Alex Net, GoogLeNet, ResNet. VGG shows the better results with 96% and GoogLeNet with 93%, ResNet with 91% and Alex-Net with 89%. We compared the results with other factors recall and precision during the experiment. In the study, we understand the accuracy also depends on the type of data used. In the future, we will continue to propose models for classification based on the different datasets, and other modalities of medical imaging data will also be considered.

## ACKNOWLEDGMENT

This study was supported by research funds from Chosun University, 2023. Data collection and sharing for this project was funded by the Alzheimer's Disease Neuroimaging Initiative (ADNI) (National Institutes of Health Grant U01 AG024904) and DOD ADNI (Department of Defense, award number W81XWH-12-2-0012). The funding details of ADNI can be found at: <http://adni.loni.usc.edu/about/funding/>.

## REFERENCES


- [1] J. A. M. Sidey-Gibbons and C. J. Sidey-Gibbons, "Machine learning in medicine: a practical introduction," *BMC Med. Res. Methodol.*, vol. 19, no. 1, p. 64, Mar. 2019
- [2] I. J. Deary and L. J. Whalley, "Recent research on the causes of Alzheimer's disease," *Br. Med. J.*, vol. 297, no. 6652, pp. 807-810, Oct. 1988
- [3] R. U. Haque and A. I. Levey, "Alzheimer's disease: A clinical perspective and future nonhuman primate research opportunities," *Proc. Natl. Acad. Sci.*, vol. 116, no. 52, pp. 26224-26229, Dec. 2019
- [4] V. Badrinarayanan, A. Kendall and R. Cipolla, "SegNet: A Deep Convolutional Encoder-Decoder Architecture for Image Segmentation," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 39, no. 12, pp. 2481-2495, Dec. 2017
- [5] F. U. R. Faisal and G.-R. Kwon, "Automated Detection of Alzheimer's Disease and Mild Cognitive Impairment Using Whole Brain MRI," *IEEE Access*, vol. 10, pp. 65055-65066, 2022
- [6] W. Kim, B. Son and I. Kim, "ViLT: Vision-and-Language Transformer Without Convolution or Region Supervision," *arXiv:2102.03334v2*, Jun. 10, 2021
- [7] N. Wang, M. Chen and K. P. Subbalakshmi, "Explainable CNN-attention Networks (C-Attention Network) for Automated Detection of Alzheimer's Disease," *arXiv:2006.14135*, Jan. 07, 2021. Accessed: Jun. 10, 2023
- [8] F. U. R. Faisal, U. Khatri and G.-R. Kwon, "Diagnosis of Alzheimer's Disease using Combined Feature Selection Method," *J. Korea Multimed Soc.*, vol. 24, no. 5, pp. 667-675, 2021
- [9] Y. Gupta, K. H. Lee, K. Y. Choi, J. J. Lee, B. C. Kim and G.-R. Kwon, "Alzheimer's disease diagnosis based on cortical and subcortical features," *J. Healthc. Eng.*, vol. 2019, 2019
- [10] M. S. Albert et al., "The diagnosis of mild cognitive impairment due to Alzheimer's disease: Recommendations from the National Institute on Aging-Alzheimer's Association workgroups on diagnostic guidelines for Alzheimer's disease," *Alzheimers Dement.*, vol. 7, no. 3, pp. 270-279, 2011
- [11] W. Yin, K. Kann, M. Yu and H. Schütze, "Comparative Study of CNN and RNN for Natural Language Processing," *arXiv:1702.01923*, Feb. 2017
- [12] A. H. Syaifullah, A. Shiino, H. Kitahara, R. Ito, M. Ishida and K. Tanigaki, "Machine Learning for Diagnosis of AD and Prediction of MCI Progression From Brain MRI Using Brain Anatomical Analysis Using Diffeomorphic Deformation," *Front. Neurol.*, vol. 11, 2021
- [13] R. Prajapati, U. Khatri and G. R. Kwon, "An Efficient Deep Neural Network

- Binary Classifier for Alzheimer's Disease Classification," in 2021 International Conference on Artificial Intelligence in Information and Communication (ICAIC), Apr. 2021
- [14] R. K. Lama and G.-R. Kwon, "Diagnosis of Alzheimer's Disease Using Brain Network," *Front. Neurosci.*, vol. 15, 2021
- [15] V. Ramineni and G.-R. Kwon, "Diagnosis of Alzheimer's Disease using Wrapper Feature Selection Method," *Smart Media J.*, vol. 12, no. 3, pp. 30-37, 2023
- [16] R. Prajapati and G.-R. Kwon, "SIP-UNet: Sequential Inputs Parallel UNet Architecture for Segmentation of Brain Tissues from Magnetic Resonance Images," *Mathematics*, vol. 10, no. 15, Art. no. 15, Jan. 2022
- [17] R. Prajapati and G.-R. Kwon, "A Binary Classifier Using Fully Connected Neural Network for Alzheimer's Disease Classification," *J. Multimed. Inf. Syst.*, vol. 9, no. 1, pp. 21-32, 2022
- [18] J. Sun, X. Cai, F. Sun and J. Zhang, "Scene image classification method based on Alex-Net model," in 2016 3rd International Conference on Informative and Cybernetics for Computational Social Systems (ICCSS), Jinzhou, Aug. 2016
- [19] T. Kaur and T. K. Gandhi, "Automated Brain Image Classification Based on VGG-16 and Transfer Learning," in 2019 International Conference on Information Technology (ICIT), pp. 94-98, Bhubaneswar, India, Dec. 2019
- [20] S. Kumar, S. Pal, V. P. Singh and P. Jaiswal, "Performance evaluation of ResNet model for classification of tomato plant disease," *Epidemiol. Methods*, vol. 12, no. 1, Jan. 2023
- [21] S. Pallawi and D. K. Singh, "Review and analysis of deep neural network models for Alzheimer's disease classification using brain medical resonance imaging," *Cogn. Comput. Syst.*, vol. n/a, no. n/a, Aug. 2022
- [22] Han Suk Choi, "Design and Implementation of an Automated Fruit Quality Classification System," *Smart Media J.*, vol. 7, no. 4, pp. 37-43, 2018
- [23] Thanh-Cong Do, Hyung Jeong Yang, Soo Hyung Kim, Guee Sang Lee, Sae Ryung Kang and Jung Joon Min, "Region of Interest Localization for Bone Age Estimation Using Whole-Body Bone Scintigraphy," *Smart Media J.*, vol. 10, no. 2, pp. 22-29, Jun. 2021

---

 Authors
 

---



Vyshnavi Ramineni

She has completed her bachelor's degree at the department of Electronics and Communication Engineering in NEC, India, in 2019. Currently, she is pursuing her Master studies at the department of Information and Communication Engineering in Chosun University, Gwangju, Republic of Korea. Her research interests include Digital Signal processing, Machine learning using Medical Imaging.



Goo-Rak Kwon

He received a Ph.D at the Department of Mechatronic Engineering, Korea University, in 2007. He has been a professor with Chosun University, since 2017. His research interest include medical image analysis, A/V signal processing, video communication, and applications. He is a senior member of the IEEE.